



Parts Included:

2 Screw-On
Leg Levellers



2 Wheel Assemblies
wheel, axle, end cap and lock collar

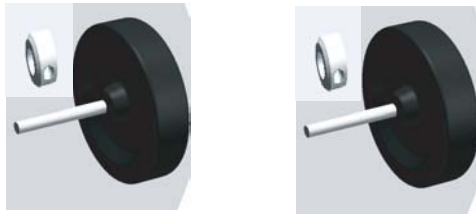

Installation How To....

Tools Required:



3/32" Allen Key

Phillips head Screw Driver - to remove packaging.

Installation Steps:

Step 1 Remove unit from crating

Inspect entire grill.
Report any damage to your local dealer immediately.
Shipping damage is not covered under warranty.

Step 2 Install leg levellers: (diagram B)

The bottom portion of each leg has a plate installed to allow for the leg leveller (diagram B)


- * Install the levellers on legs 1 & 2 (diagram A)
- * Turn each of the leg levellers in a clockwise direction into the bottom leg plate. Turn approximately 1/2 of the way in.

Step 3 Install wheel assemblies: (diagram C)



- * Install the wheel assemblies on legs 3 & 4 (diagram A)
- * Insert axle through the leg assembly.
The wheel should be on the outside edge of the assembly.
- * Slide the lock collar onto the axle.
The collar should be close to, not tight to, the leg.
- * Using the 3/32" L key, tighten the set screw firmly against the axle.

Step 4 Final Check:

- * Ensure that the "J" Grease Can Hanger is installed and your favorite empty beverage can is hung with care.
- * Ensure the Burn Grate and Burn Pot are correctly installed.
- * Check the installation of the "Arched Flavor Guard" and cooking grid.
- * Ensure that the unit is connected to a grounded electrical connection.

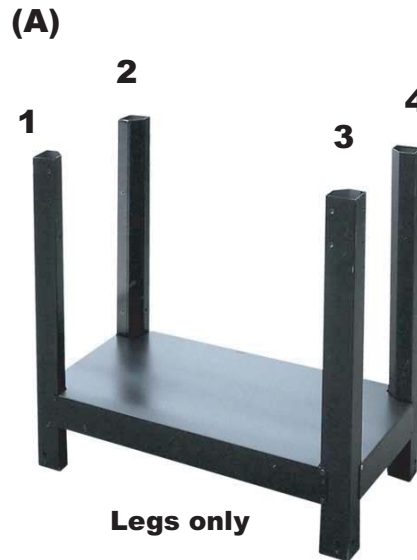

Legs only

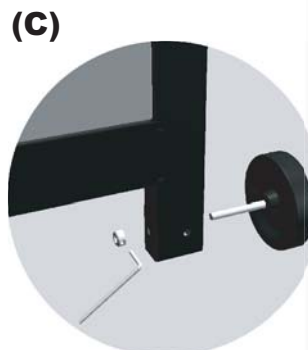

WHEELS AND LEVELLERS

DGI Dansons Group Inc.
Responsible Resource Development

"The Innovators."

Louisiana Grills Customer Service

Toll Free: 1-877-303-3134

Email: service@dansons.com

